


Configurar Droidstar (Android) – Existe também para windows e Linux, mas chama-se dudestar

Vamos começar pelas settings

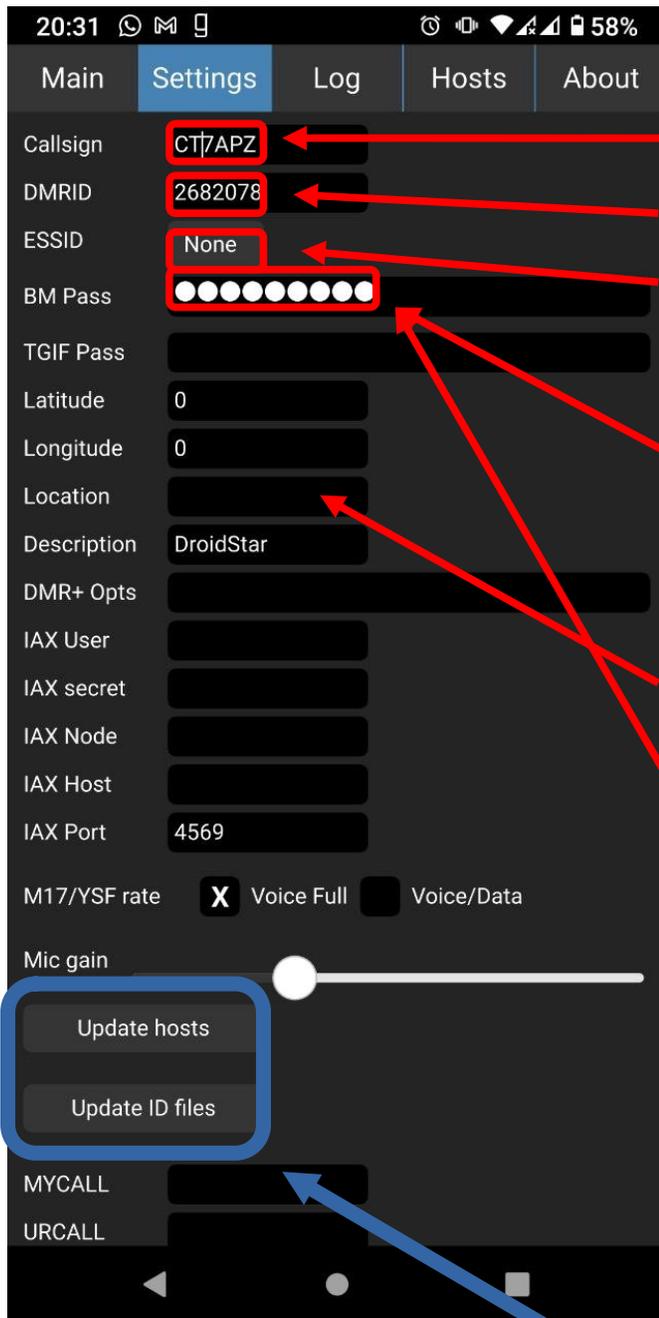

Callsing – Indicativo de amador


DMRID – O ID digitar criado (268xxxx)

ESSID (é um número que vai aparecer após o id para ter vários dispositivos – Não deve ser repetido)


BM Pass: Password colocada no hotspot security do brandmeister (se foi a que criei é a mesma que forneci para acesso ao brandmeister)

Preencher a localização habitual

(se der erro deve ser esta password errada)

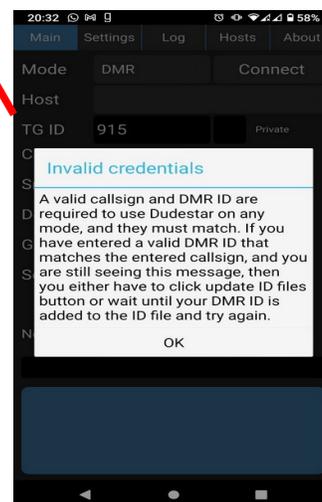

Não necessita de mais configurações (eventualmente fazer update de hosts e id files)

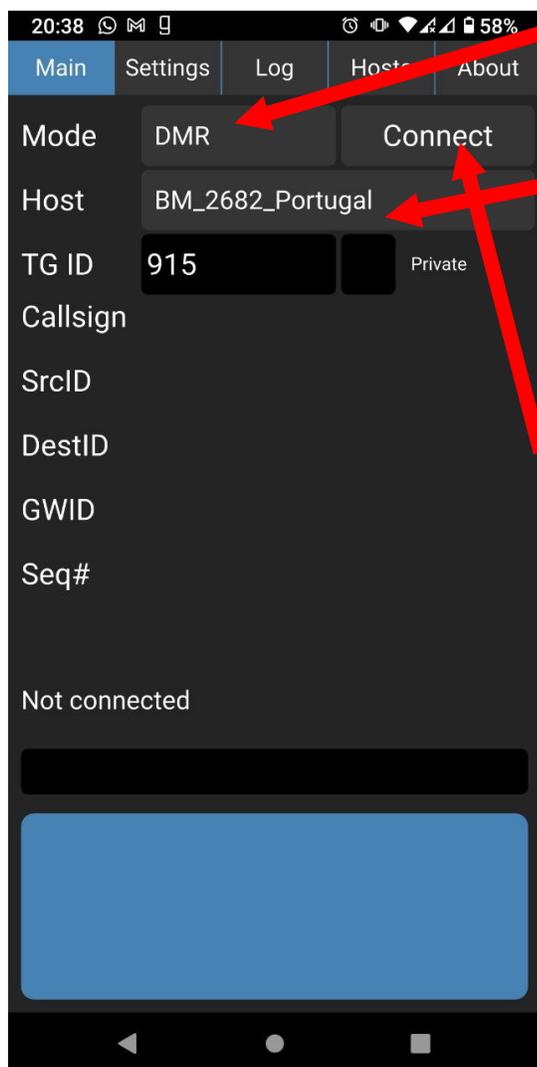

No menu main, colocar o modo DMR (se for operar DMR);

Host (BM_2682_Portugal) funciona com qualquer host mas não faz sentido pelo aumento de latências de rede

Primir connect

Escolha do Talk Group (TG)

- 91 – Grupo mundial (NET ao sábado 16 UTC) - ingles
- 915 – Mundial Lingua Portuguesa (Net à quarta conforme o plano NETCT 22h de Lisboa)
- 268 – Nacional (A maioria dos repetidores tem este grupo estatico em s1 -bom para chamada)
- 268912 - Link DSTAR - (Net à quarta conforme o plano NETCT 22h de Lisboa)
- 2682913 – Link Fusion - (Net à quarta conforme o plano NETCT 22h de Lisboa)

268914 – Link echolink

268911 – Hotspot (um dos grupos mais usados para QSO longo)

Mais TG ver: <https://dmr-portugal.org/>

Pode confirmar no dashboad DMR em: <https://dmr-portugal.org/bm268/bm2682/>

Deve sempre verificar a qualidade do áudio no rádio ou no VU Meter no hose do DMR Portugal <https://dmr-portugal.org/hose/>

The screenshot shows a software interface with a menu of channels at the top: 91 (WW), 915 (netCT), 268 (Portugal), 2681 (Norte), 2682 (Centro), 2683 (Capital), 2684 (Alentejo), 9075 (Jota Joti), 268912 (DSTAR/DMR/YSF), 268913 (C4FM/Fusion), 268911 (Hotspot 1), and 268914 (DMR<->CS5LART). Below the menu is a log window with the following text: "Call ended", "New call / source: 2682078 destination: 915", "Talker: CT7APZ Braulio", "Call ended", "New call / source: 2683007 destination: 915", "Talker: CT1JIB Jorge QAP 268303", "Call ended", "New call / source: 2682078 destination: 915", "Talker: CT7APZ Braulio". At the bottom, a VU Meter shows a reading of -41.61 dBm with a green bar.

Se aparecer como abaixo deve diminuir o ganho do micro

This screenshot is similar to the one above, but the VU Meter shows a reading of -14.88 dBm. A red arrow points from the top of the call log window down to a red rectangular box that highlights a portion of the VU Meter's scale, indicating that the microphone gain should be reduced.